


SPIT CG6 - HCG6



DESCRIPTION

- Using for PVC-U trunking
- The patented energy absorber design eliminated damage to the trunking and prevents deformation.
- The head of the pin is designed to countersink into the washer stopping contact between the metal pin head and cabling.

PROPERTIES MATERIAL

Shank in carbon steel

- Total length Lt: 15, 20, 25, 30, 35 mm
- Electrogalvanised, min zinc coating 5 µm
- Hardness (HCG6-15/CG6-22): 53 to 56 HRc
- Hardness (CG6-20/25/30): 50 to 55 HRc


TOOL

P800E



PIN LENGTH SELECTION

| CG6/HCG6 range | Length (LT) | White strip 500 pcs/box* |
|----------------|-------------|-----------------------------|
| CG6-20 | 20 | 057563 |
| CG6-25 | 25 | 057564 |
| CG6-30 | 30 | 057565 |
| HCG6-15 | 15 | 057567 |
| HCG6-22 | 22 | 057568 |

*: leaves no plastic residue after fixing

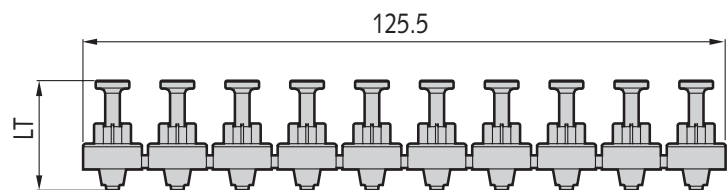

RECOMMENDED LOAD

| CG6 range |  | Characteristic resistance | | Recommended load | |
|---|---|---------------------------|----------------------|-----------------------|-----------------------|
| | | N _{Rk} (kN) | V _{Rk} (kN) | N _{Rec} (kN) | V _{Rec} (kN) |
|  C20/25 to C30/37 | H _{nom} ⁽¹⁾ = 15 mm | 0.87 | 0.75 | 0.30 | 0.25 |
| | H _{nom} ⁽¹⁾ = 18 mm | 1.19 | | 0.40 | |
| | H _{nom} ⁽¹⁾ = 20 mm | 1.41 | | 0.47 | |

(1) Embedment depth
H_{nom} = 15-20 mm is recommended

L = H_{nom} + t_{fix} (see p. 13)