


# POLYESTER BRAIDED SLEEVES

Scheda Tecnica aggiornata al **22.09.2016** / pag. 1 di 1

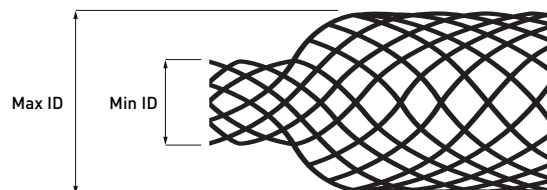

## FEATURES

Extreme easy insertion  
Good chemical resistance  
Very resistant against abrasion  
Good wear resistance

## VERSIONS

● Black  
● Grey

## PACKAGING

Reel

## MATERIALS

PET

## FIELD OF USE

**Continuous operating temperature:**  
-40°C ÷ +150°C

## APPROVALS / CERTIFICATIONS

DIN 5510  
FMVSS 302  
EN 45545-2

DIMENSIONS		PACKAGING
Minimum ID (NOM)	Max ID (NOM)	Reel
mm	mm	m
6	12	100
8	15	100
10	18	100
12	22	50
15	25	50
18	28	50
20	30	50
25	38	50
30	49	50
40	60	50

TECHNICAL PROPERTIES			
Description	Test method	Typical value	UM
Continuous temperature of use	-	-40/150	°C
Short term heat ageing	(240h / 175°C)	no visual change or other damages	-
Tensile strength	LV 312-3 6.3.3	28,2	N
Flammability	FMVSS 302	class A	-
Oxygen index	EN 45545-2	39	%
Toxicity index	NF X 70-100	I.T.C = 10,96	-
Smoke density	EN 45545-2	Ds Max = 171	
Smoke toxicity	EN 45545-2	CITNLP = 0,12	