


PVC TAPES

thickness 0,13mm

Technical Data Sheet update to **22.09.2016** / pag. 1 of 1

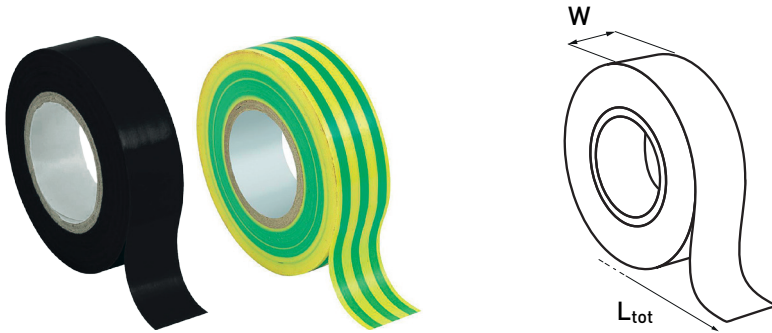

APPLICATIONS

Electrical installations
 Insulation and cable marking
 Automotive
 Identification

VERSIONS

- Black (N)
- Green/yellow stripes (T)
- White (BI)
- Red (R)
- Grey (GR)
- Blue (BL)
- Yellow (GI)
- Brown (M)

PACKAGING

10 m roll
 25 m roll

MATERIAL

PVC

CONTINUOUS OPERATING TEMPERATURE

-18°C ÷ +90°C

APPROVALS

CEI EN 60454-3-1



VDE n. 40039640

CODE	DIMENSIONS		PACKAGING	
	Width mm	Length m	Rolls per tower pcs	Rolls per pack pcs
	W	L _{tot}		
NI 20X	15	10	10	200
NI 21X	15	25	12	144
NI 22X	19	25	10	120
NI23X	19	10	10	200
NI 24X	25	25	8	96
NI 26X	38	25	5	60
NI 27X	50	10	4	60
NI 28X	50	25	4	48

Specify the colour X using the codes (see VERSIONS)

TECHNICAL PROPERTIES			
Description	Test method	Typical value	UM
Thickness	ASTM D 638	0,13	mm
Adhesion to steel	ASTM D 2671	2,2	N/cm
Adhesion to backing	ASTM D 570	2,2	N/cm
Flammability	ASTM D 1000	Self-extinguishing	-
Elongation at break	ASTM D 638	140	%
Tensile strength	ASTM D 639	27	N/cm
Dielectric breakdown	ASTM D 640	6	kV