


T-CLICK ANCHOR

Data 16/04/14




APPLICATION

- Fixing to plasterboard and aerated concrete;
- Bathroom accessories, wall heaters;
- Electrical switch boxes, trunking, conduit;
- Curtain track.

MATERIAL

- Anchor body reinforced FG polyamid
- Special screw supplied, head type PZ2

INSTALLATION

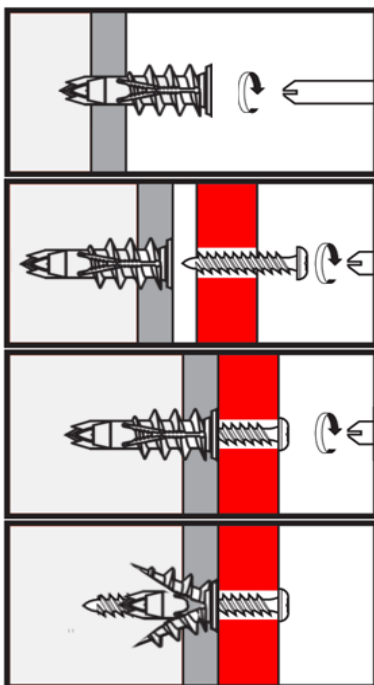


Self drilling anchor for plasterboard & aerated concrete

Technical data

Type	Code	Max thick of part to be fixed mm	Ø Screw mm	Ø Collar mm	Ø Screw head mm	Screw length mm	Total anchor length mm	Box pz	Carton pz
Type	Code	t _{fix}	d	-	D	L1	L	-	-
T-CLICK/25 TP 10	566261	10	4,5	14	10,5	45	38	25	800
T-CLICK TP 10	566301	10	4,5	14	10,5	45	38	100	800

NOTA Predrilling with HSS drill bit Ø 8 mm is required in aerated concrete or plasterboard

Recommended and ultimate loads (kN)

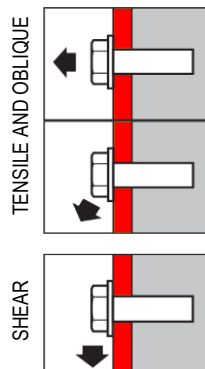

Aerated concrete		Plasterboard (10 mm)		Plasterboard (13 mm)		Plasterboard (13 + 13 mm)	
N _{rec}	N _{u,m}	N _{rec}	N _{u,m}	N _{rec}	N _{u,m}	N _{rec}	N _{u,m}
9,5	0,49	0,06	0,29	0,09	0,45	0,15	0,80

Aerated concrete		Plasterboard (10 mm)		Plasterboard (13 mm)		Plasterboard (13 + 13 mm)	
V _{rec}	V _{u,m}	V _{rec}	V _{u,m}	V _{rec}	V _{u,m}	N _{rec}	N _{u,m}
0,25	1,20	0,15	0,75	0,24	1,10	0,27	1,20

NOTE The tests are performed on normal availability base materials. Check and adopt other appropriate safety factors.