




haubold®

PN755



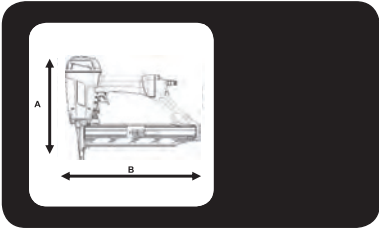

PN755



		A = 298 mm B = 384 mm C = 86 mm
		= 2,19 kg







Min. 5,0 bar Max. 8,3 bar
1,4 l (6 bar) /
Ps max. = 8,3 bar






 <small>EN 12549+EN ISO 4871</small>	L_{WA,1s} = 97,3 dBA L_{pA,1s} = 92,0 dBA L_{pA,1s,1M} = 84,3 dBA
<small>EN12096 : 1997</small> <small>ISO 8662-11</small>	Vibration = 2,4 m/s²

150x =	 Haubold Staples KG700	 B = 11,3 mm L = 18-55 mm d = 1,34 x 1,6 mm
---------------	----------------------------------	---






	<p>Sequential trigger actuation/ Einzelauslösung/ enkelschots/ Déclenchement du tir - mode séquentiel/ Funcionamiento secuencial "en continuo"/ Gatilho de actuação sequencial/ funzionamento sequenziale (colpo a colpo)/ Enkeltskuds aftrækker/ Enkelskott/ Enkeltskudds avtrekker/ Kertalaukaisu/ Üksiklasu meetodil töötamine/ Uruchomienie spustu sekwencyjne/ Sekvenční poušť/ Egyes lövés (szakaszosan működtetett elsütő billentyűvel)/ Posamezno proženje/ Kontaktirajte singl / Последовательная активация при нажатии на курок/ Sekvenčná aktivácia spúšte/ التشغيل بالزر التسلسلي المقيد / Nuoseklusis paleidimo mechanizmas/ Sekvencialās palaiēs iedarbināšana Raðkveikjuvirkjun</p>
	<p>Contact trigger actuation/ Kontaktauslösung/ repeterend schieten/ Déclenchement du tir - mode rafale/ Funcionamiento por contacto "clavo a clavo"/ Gatilho de actuação por contacto/ funcionamiento a contatto/ Stødskydnings aftrækker/ Støtskjutning/ Støtspikrings avtrekker/ Kosketuslaukaisu/ Automaatmeetodil töötamine/ Uruchomienie spustu przez kontakt/ Kontaktní poušť/ Sorozatlövés (folyamatosan behúzott elsütő billentyűvel)/ Kontaktno proženje/ Kontaktirajte pokretanje/ Контактная активация при нажатии на курок/ Kontaktná aktivácia spúšte/ التشغيل بتلامس الزر / Kontaktinis paleidimo mechanizmas/ Kontakta palaiēs iedarbināšana/ Snertikveikjuvirkjun</p>

<p>Model: PN755 Sequential No. 574444</p>   <p>PN755 Part No. 574444 Code: 574444 Type: Airless Contact TW Befestigungssysteme GmbH, Carl-Zeiss-Str. 18 - 39608 Helmstedt, Germany</p>	<p>Model: PN755 Contact No. 574443</p>   <p>PN755 Part No. 574443 Code: 574443 Type: Airless Contact TW Befestigungssysteme GmbH, Carl-Zeiss-Str. 18 - 39608 Helmstedt, Germany</p>
  <p>No. 575641</p>	








				 <p>2x</p>
<p>No. 014748 + No. 575182</p>		<p>No. 014121</p>		


Accessories

	
<p>No. 151299 / No. 576216 0,5 l oil / 1 l oil</p>	







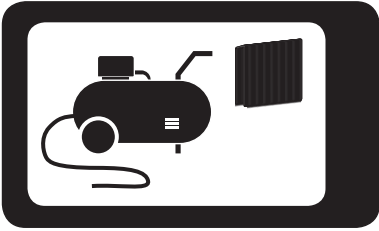







014 748

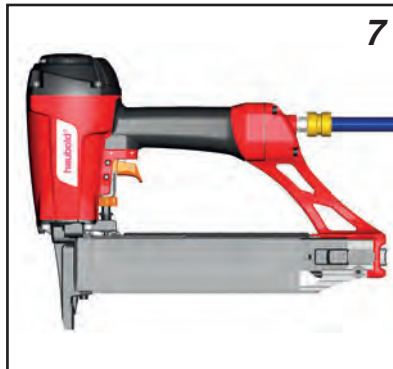


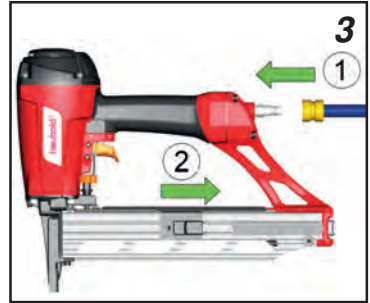




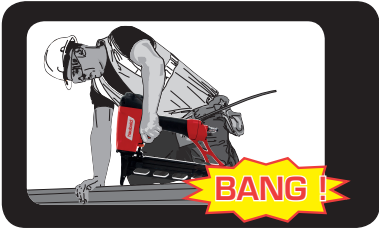

014 748

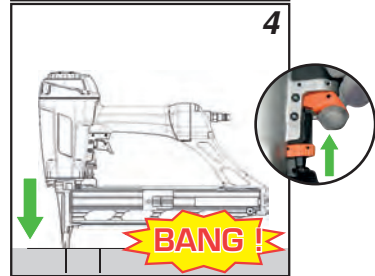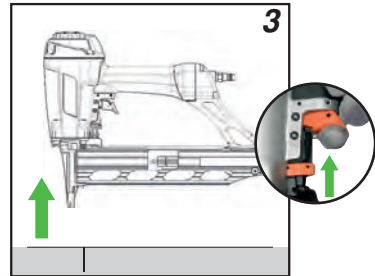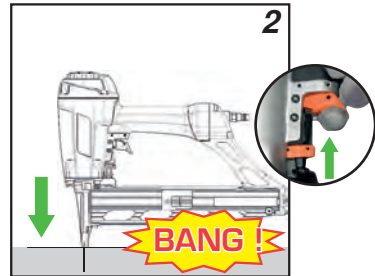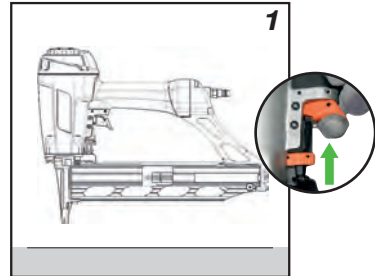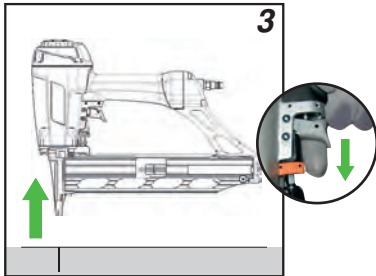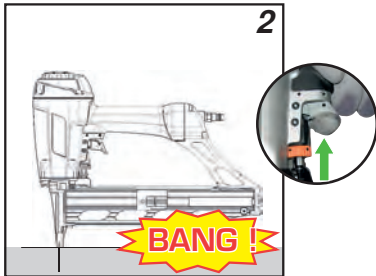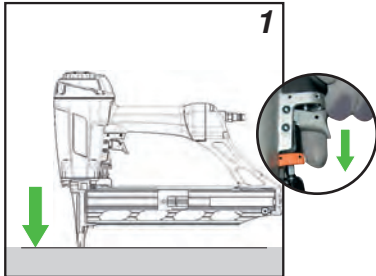

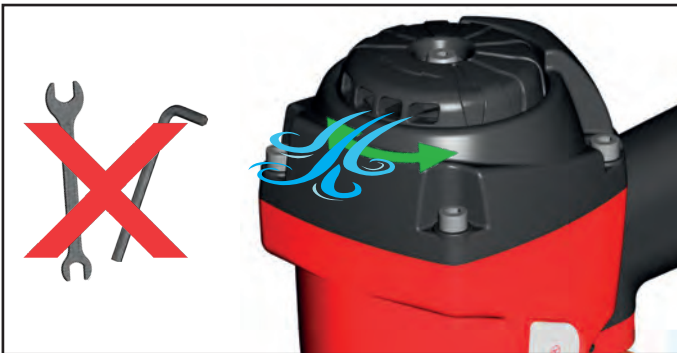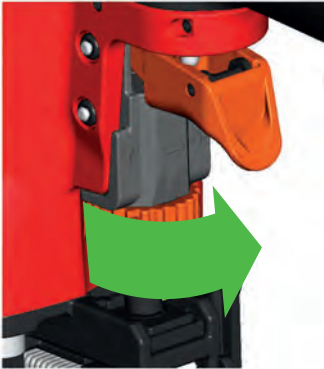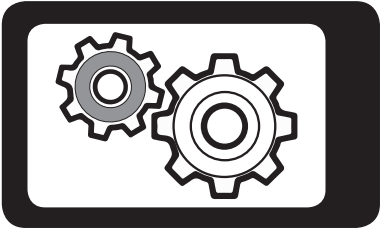



YY/WW....



YY= Year of manufacture
WW = Week of manufacture

**Resting position/ Ruheposition/ Position de repos/ Ruststand/
Posición de descanso/ Posizione di riposo/ Posição de des-
canso/ Pozycja spoczynku/ Klidová poloha/ Nyugalmi állapot/
Положение в нерабочем состоянии/ Θέση αδράνειας/ Hviles-
tilling/ Viloläge/ Hvileposisjon/ Lepoasento/ Položaj mirovanja/
Pokoјová poloha/ Položaj mirovanja/ وضع السكون / Ramybės
padėtis/ Ooteasend/ Miera stāvoklis/ Hvíldarstaða**



haubold[®]

ITW CONSTRUCTION PRODUCTS EUROPE
Code 575182 (05/2019)
www.spitpaslode.com